



ACFM SERIES

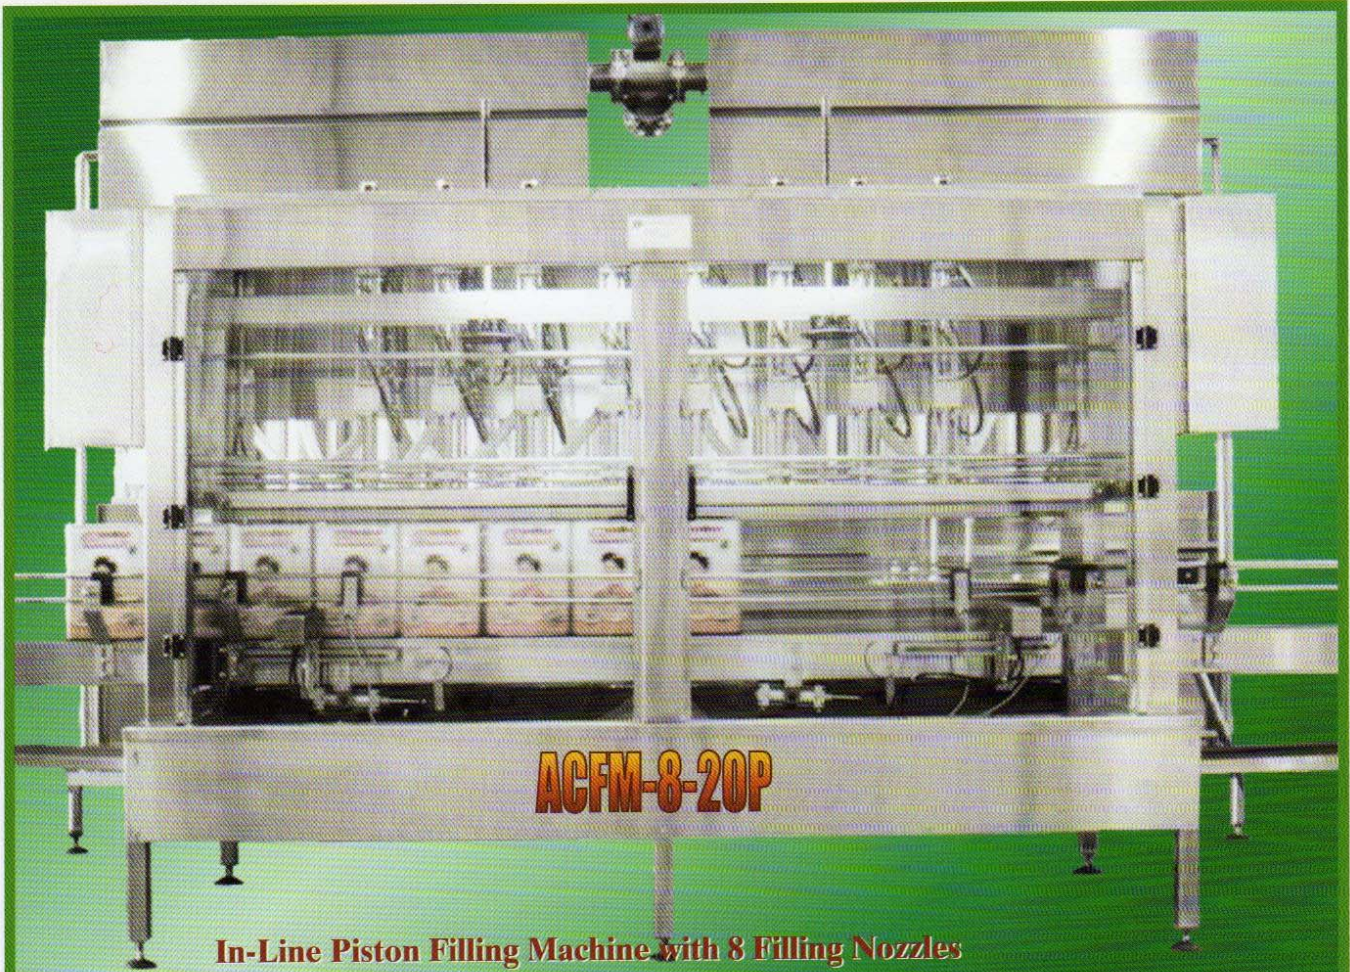

In-Line Piston Filling Machine with 8 Filling Nozzles

Side View

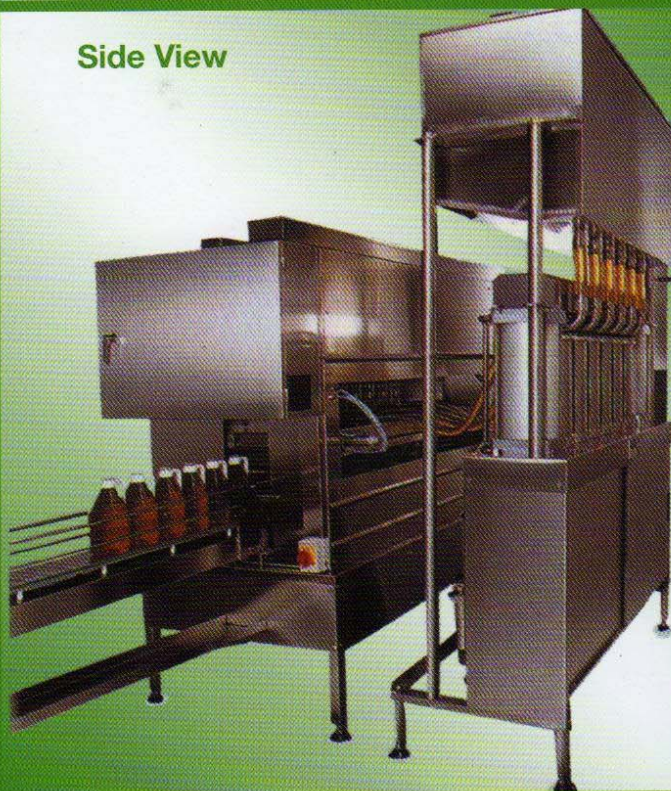

INTERVIEW VIEW OF FILLING SECTION

ACFM Series



Types of Container

MACHINE DATA SHEET

MODEL	ACFM-8-20P	ACFM-4-20P	ACFM-8-5P	ACFM-6-5P
Filling Nozzle	8	4	8	6
Filling Mode	Dive-in below bung fill		Top Fill	
Filling Volume (Litre)	5 - 20		0.5 - 5	
Mechanical Output Speed	1,200 CPH	600 CPH	3,000 CPH	2,400 CPH
Conveyor Length (M)	12	6	6	6
Conveyor Chain	SS Slat Chain		Delrin Plastic slat Chain	
Construction	SS304 Header Tank, SS 304 exterior clad with powder coated m. s. structure			
Air Pressure Required	6 kg/cm ²			
Air Consumption	0.3 Cum/min			
Electrical Supply Required	415 VAC, 50/60Hz 3 phase, 1.5Kw		415 VAC, 50/60 Hz, 3 phase, 750w	
Control Panel Protection Class	Splash Proof			
Weight	~ 1,500 Kg	~ 1,000 Kg	~ 800 Kg	
Wetted Parts	Stainless Steel 304, PTFE Seals and PVC Hoses			
Machine Dimension (LxWxH) M	12 x 2.2 x 3.2 m	6 x 2.2 x 3.2 m	6 x 2.2 x 3.1 m	

Note: Specification may be changed for improvement without notice.